



## I. REASSEMBLING SWIVEL BRACKET ASSEMBLY

### STEPS 1-7 AS NEEDED

1. Reassemble reverse lock assembly and shallow drive bracket to swivel bracket.
  - Drive in spring pin.

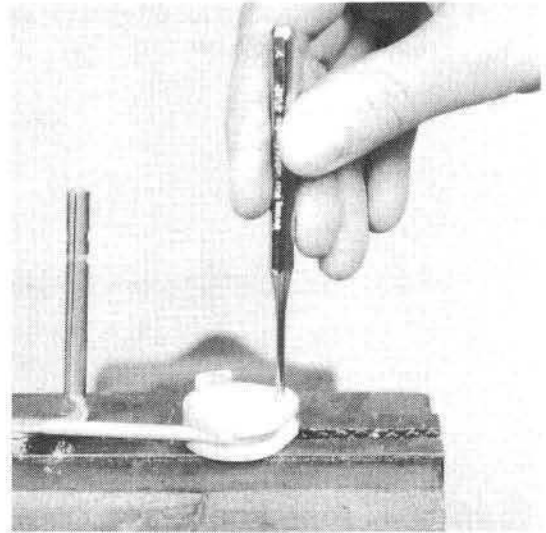

2. Slide in reverse lock intermediate lever (A) and two bearings (B).

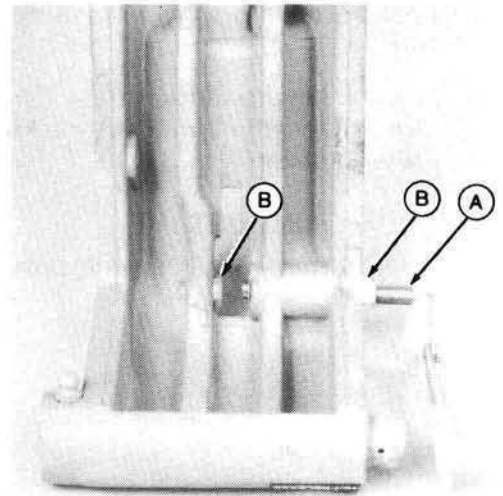

3. Drive spring pin in securing reverse lock link (A) to reverse lock lever (B).

